



**MAXBAU**  
MATERIALE

S.C. MAX BAU Materiale S.R.L  
Parc P3 Logistik, Depozit 2,  
Str. Italia 1-7, comuna Chiajna,  
jud. Ilfov, România  
office@maxbau.ro

## 1.PRODUCT DESCRIPTION

PRODUCT BRAND	ANTI-SLIP PLYWOOD
SIZE(MM)	1250 × 2500
MIN THICKNESS (MM)	15 MM
FILM TYPES	FINLAND DYNEA FILM(120g/M <sup>2</sup> )
CORE	BIRCH CORE
PROCESSING OF EDGE	PHENOLIC PAINT
DENSITY	700 KG/M <sup>3</sup>
GLUE	72 HRS PHENOLIC W.B.P GLUE
MOISTURE CONTENT	8%-10%
TIMES OF HOT-PRESS	TWO TIMES HOT-PRESS
TIMES OF SANDING	TWO TIMES SANDING
USAGE	PLATFORM/SCAFFOLDING/TRANSPORTATION

## 2.TECHNICAL SPECIFICATION


NO	PROPERTY		UNIT	TEST OF METHOD	VALUE OF TEST	RESULT
1	MOISTURE CONTENT		%	EN 322	8.1%	CHECK OUT
2	DENSITY		KG/M <sup>3</sup>	EN 323	700	CHECK OUT
3	BONDING QUALITY	BONDING QUALITY	MPA	EN 314	MAX:1.88 MIN:0.99	CHECK OUT
		DAMAGE RATE	%		95%	
4	BENDING MODULUS OF ELASICITY	LONGITUDINAL	MPA	EN 310	10595	CHECK OUT
		LATERAL			7914	
5	BENDING STRENGTH N/MM	LONGITUDINAL	MPA		81.34	CHECK OUT
		LATERAL			80.25	

### 3. TESTING REPORT

**LABORATORY TEST**



**INSPECTION PICS**

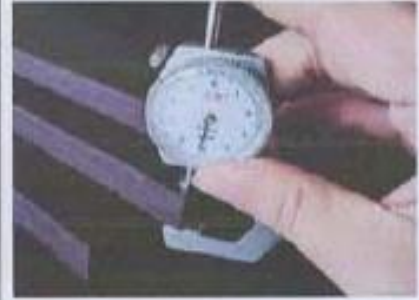

**"WE(CAMELPLY LABORATORY), HEREBY CERTIFY THAT THE REPORT ARE TRUE AND CORRECT AND AGAINST STANDARD CE STANDARD(EN322/323/314/310), THAT NO DIFFERENT REPORT OF THE SAME GOODS HAS BEEN OR WILL BE ISSUE.**